



- Latest generation infrared technology
- Ultra HD resolution
- Anti-glare glass
- Easyfix Proximity Sensor (optional)
- Easyfix Video Conferencing Unit (optional)
- Android onboard
- Integrated Legamaster appstore
- Integrated AirServer software

## ETX touch monitor

### ETX-5520

- Razor-sharp, high-quality images in Ultra-HD
- Slim appearance with a high build quality and thin bezels
- One-button operation, prominently located on the front bezel, enables fast and efficient access to the main menu
- State-of-the-art screen mirroring from laptops, tablets and phones with the AirServer software that has been pre-programmed on the ETX e-Screens
- Incredible versatility due to the embedded Android environment, with access to millions of applications through the app store
- Extend the platform with the software you want, by using a Legamaster OPS computer. Or simply connect a laptop or desktop computer
- Full line of (electrical height-adjustable) mounting solutions and matching accessories, like the Easyfix Video Conferencing Unit and the Easyfix Proximity Sensor, to easily upgrade your system and use its full potential in schools, universities and office buildings
- The latest generation high-precision infrared touch system offers 32 touch-points and a fast-as-lightning touch experience


## Recommended accessories

- Sessions software license full  
Ref.:7-197062-1
- Soundbar LS2000 Ref.:7-198121
- OPS computer OPS KL-i700 W10  
Ref.:7-861322-03

Ref.: **7-803120-55**

EAN: **8713797092470**



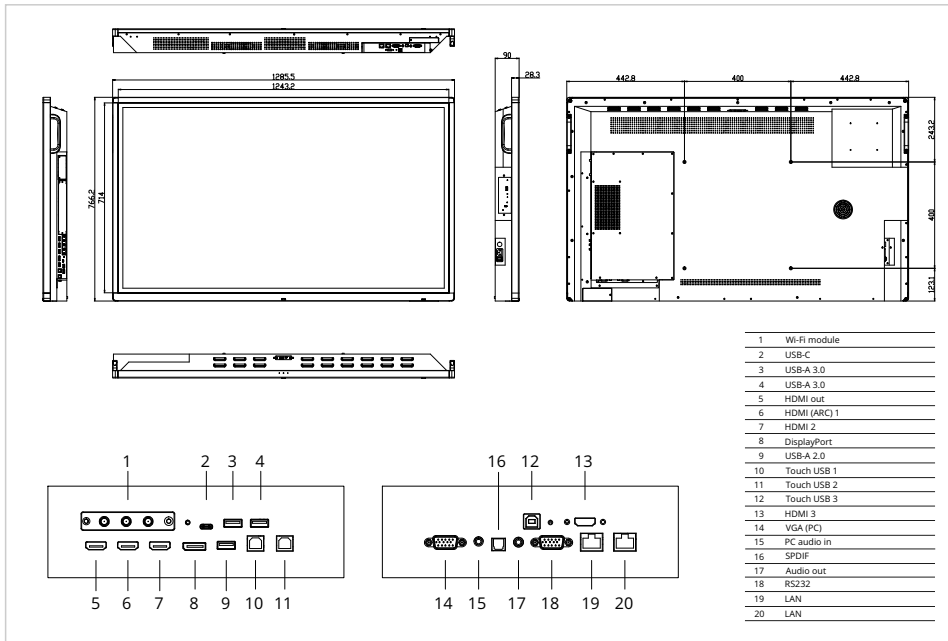

- 1 Wi-Fi module
- 2 USB-C
- 3 USB-A 3.0
- 4 USB-A 3.0
- 5 HDMI out
- 6 HDMI (ARC) 1
- 7 HDMI 2
- 8 DisplayPort
- 9 USB-A 2.0
- 10 Touch USB 1
- 11 Touch USB 2
- 12 Touch USB 3
- 13 HDMI 3
- 14 VGA (PC)
- 15 PC audio in
- 16 SPDIF
- 17 Audio out
- 18 RS232
- 19 LAN
- 20 LAN

## Specifications

Viewing angle max	H: 178 ° / V: 178 °
Brightness	350 cd/m <sup>2</sup>
Response time	9 ms
Supported colours	1073,3M
Video resolution / refresh rate	3840 x 2160 / 60 (px / Hz)
Input resolution / refresh rate	3840 x 2160 / 60 (px / Hz)
Ops slot	Yes
Fanless design	Yes
Display control	Touch OSD, Keypad, RS-232C, IR remote controller
Automatic brightness adjustment	Yes
Speaker	3x15W
Power / Sleep / Standby	114 / 22 / 0.5 (Watt)
Durability / Lifespan	16/7 / 40000 (hours)
Input connectors	HDMI (3x), DisplayPort, USB-A 3.0 (3x), USB-A 2.0, USB-C, VGA, PC audio-in, Ethernet (2x)
Output connectors	HDMI, mini-toslink, Audio line-out
Touch technology	Advanced infra-red touch technology
Touch operation	Finger, Glove, Stylus
Number of touch points	32
Driver	Win: plug and play (optional driver) / Mac: driver
Supported OS	Android, Linux, Mac OSX, Windows 10, Windows 8.1, Windows 7
Graphics	Mali G51 MP4
CPU	ARM Cortex A73x2, ARM Cortex A53x2
Internal memory	4 / -
Disk storage	32 / -

## Logistics

Quantity	1
Packing dimensions	232 x 1414 x 901 (mm)
Weight (gross/net)	45.00 kg / 34.30 kg